

# CAT6 FLAT LIFT TRAVEL CABLE

## CAT 6 Elevator Cable

### APPLICATIONS

This is used as Elevator data cables in elevators. Supports all Cat6/Class-e applications. (eg. 10 Base-T, 1000 Base-T). Elevator Data Lan Cable optimized for RJ45 plug systems supporting AWG 23 standard wires.

### CONSTRUCTION

Conductor: Bare Copper Wires

Cross Sectional Area: 23 AWG

Insulation: PVC, Black or Grey

Data Element: AWG 23

Conductor: Bare Copper wires

Insulation: PE

Core Code: Pair Twisting

Colours: 1 Pair: Blue/White - Blue

2 Pair: Orange/White - Orange

3 Pair: Green/White - Green

4 Pair: Brown / White - Brown

1 Shield: Al /PETP foil per pair

2 Shield: Tinned Cu Wire Braid

Sheath: PVC. Black or Grey

### CHARACTERISTICS

Voltage Rating : 300


Temperature Limits: Fixed: -20°C to +70°C

Minimum Bending Radius:

As per Cable Manufacturer's Data Sheet



CAT6 Elevator Cable

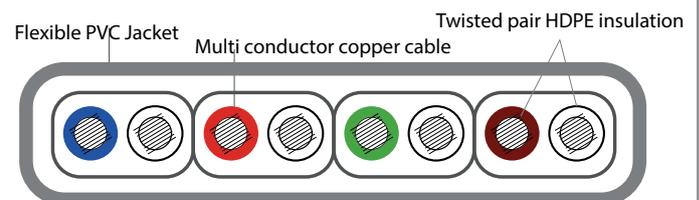

### CORE IDENTIFICATION

Pair 1: ■ Red ■ Brown

Pair 2: ■ Green □ white

### Electrical Characteristics

Conductor resistance (7100m @ 20 J )	Max.	9.5	
DC resistance unbalance (%)	Max.	4	
Pair-to-ground capacitance unbalance (pF/km)	Max.	1600	
Delay skew (ns/100m)	Max.	45	4 ≤ f ≤ 250MHz
Insertion Loss (dB/100m)	Max.	82 * f + 0.0169 * f 0.25 + /'f	1 ≤ f ≤ 250MHz
Pair to Pair NEXT (dB/100m)	Min.	75.3 - 15 * log(f)	1 ≤ f ≤ 250MHz
Power Sum pr-pr NEXT (dB/100m)	Min.	72.3 - 15 * log(f)	1 ≤ f ≤ 250MHz
ELFEXT (dB/100m)	Min.	68 - 20 * log(f)	1 ≤ f ≤ 250MHz
Power Sum ELFEXT (dB/100m)	Min.	65 - 20 * log(f)	1 ≤ f ≤ 250MHz
Return Loss (dB)	Min.	20 + 5 * log(f)	1 ≤ f ≤ 250MHz
Propagation Delay (ns/100m)	Max.	25	10 ≤ f ≤ 20MHz
		25 - 7 * log(f / 20)	20 ≤ f ≤ 250MHz
		534 + 36 H	1 ≤ f ≤ 250MHz

**Electrical Properties**

Rated Voltage	100/100V
Conductor resistance	max. 270 ohms/km at 20°C
Impedance	100 ± 15 Ohm
Capacitance	43pF/m

**Mechanical Properties**

Overall Dimensions	Approx. 39 x 8.2 mm
Weight	Approx. 440 kg/ km
Copper Content	70kg/km
Free Suspension Length	Max. 45 m
Travel Height	Max. 90m
Running Speed	Max. 4m/s
Operating Temperature	-20°C + +70°C
Bending Radius	Min. 8 x Thickness of the Cable
Supply Length	305m / 500m

**Reference Standards**

Flammability: Comply to IEC 60332-1, VW-1 / IEC 60228

Comply to RoHS

**Ordering Information**

Part No.	Description
NTLTC6U	NETCON, Cat6, Flat Lift Travel Multi Conductor Copper cable, PVC, 305m