


## NT-RP24UE2-ES-1U-BK - Cat.6

**Patch panels 19" , 1U, 24 ports,  
RJ45 /8P8C, 110 / KRONE, T568A / B,  
Unshielded**

Patch panels are designed to install cables in various structured cabling subsystems and connect individual network components to each other using patch cords.

NETCON NT-RP24UE2-ES-1U-BK (Cat.6) unshielded patch panels are made in classic black color and designed for installation in a 19" cabinet or rack. These panels have a standard height of 1 U and can accommodate up to 24 incoming cables to RJ45/8P8C ports. Universal IDC design allows to use both 110 and KRONE type punch-down tools to terminate cables. For ease of administration, all ports are numbered and additional marking platforms are available. Patch panel kit include convenient removable managers for incoming cable routing.

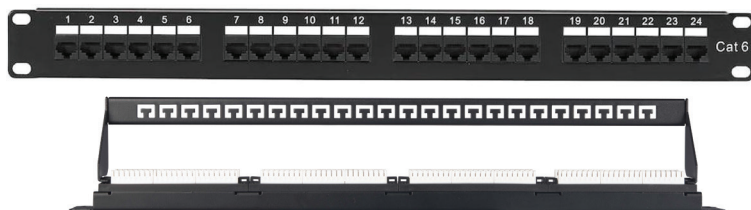

- ◆ **Removable Cable Organizer Kit**
- ◆ **Exceeds the requirements of  
ISO / IEC 11801 EN 50173 and  
TIA / EIA - 568 standards**

| Basic Equipment           | NT-RP24SE2-ES-1U -MT | NT-RP24UE2-ES-1U-BK |
|---------------------------|----------------------|---------------------|
| Patch Panel               | 1 pc.                | 1 pc.               |
| Cable Organizer           | 1 pc.                | 1 pc.               |
| Installation Instructions | 1 pc.                | 1 pc.               |
| Screed Kit                | 1 set                | 1 set               |
| Screw-Washer-nut          | 1 pc.                | 1 pc.               |

## SPECIFICATIONS

|                                | NT-RP24SE2-ES-1U -MT / NT-RP24UE2-ES-1U-BK                                  |
|--------------------------------|-----------------------------------------------------------------------------|
| Type                           | Shielded/ Unshielded                                                        |
| Ports                          | 24                                                                          |
| Type of module to be installed | Keystone (no wider than 17mm)                                               |
| Marking                        | All ports are numbered, there are additional labeling area Installation 19" |
| Cabinet or rack                |                                                                             |
| Height                         | 1 U (44.5 mm)                                                               |
| Depth                          | 157 mm                                                                      |
| Housing Material               | Nickel-plated steel, 1.5 mm/ Metal PVC                                      |
| Color                          | Metallic (Nickel)/ Black                                                    |
| Temperature Ranges             | Storage -40 to +70 ° C. Installation 0 to +50 ° C. Operating -10 to +60 ° C |
| Packaging                      | Cardboard box                                                               |
| Warranty                       | 1 year/25years                                                              |

## ORDERING INFORMATION

| Type       | Cat.           | Modules series «Fast Termination» For quick sealing NT-FT-TOOL or a 110 / KRONE knife |                    | Modules «NT» series Tool-less | Modules for punch down tool with a 110/KRONE knife |
|------------|----------------|---------------------------------------------------------------------------------------|--------------------|-------------------------------|----------------------------------------------------|
|            |                | Basic(FT)                                                                             | With shutters (ST) |                               |                                                    |
| Unshielded | 6 <sub>A</sub> | NT-KJSA2-FT-MT                                                                        | –                  | NT-KJSA2-NT-MT–               |                                                    |
|            | 6              | NT-KJSE2-FT-MT                                                                        | –                  | NT-KJSE2-NT-MT                | –                                                  |
|            | 5e             | NT-KJSD2-FT-MT                                                                        | –                  | NT-KJSD2-NT-MT                | –                                                  |
|            | 6              | NT-KJUE2-FT-WT                                                                        | NT-KJUE2-ST-WT     | NT-KJUE2-NT-WT                | NT-KJUE2-WT                                        |
|            | 5e             | NT-KJUD2-FT-WT                                                                        | NT-KJUD2-ST-WT     | NT-KJUD2-NT-WT                | NT-KJUD2-WT 3                                      |
|            | –              |                                                                                       | –                  | –                             | NT-KJUC3-WT                                        |