



OUWTCF073001-EMC

Technical Construction File
For
Netcon Enterprise Pvt Ltd.
NETCON Outdoor UPS 1-10KVA with air conditioner
Model: NTPR1K, NTPR2K, NTPR3K, NTPR6K, NTPR10K

Prepared For : Netcon Enterprise Pvt Ltd.
430A, Kathirvedu, Puzhal, Chennai- 600066, India

Prepared By : Shenzhen Huahai Testing Technology Co., LTD.
Building h-h, Huachuangda Center Business Building, Xinghua
First Road, Baoan District, Shenzhen City, Guangdong Province

Report Number: OUWTCF073001-EMC

Date of Test: 2024-08-05

Date of Report: 2024-08-05



TEST REPORT DECLARATION

Applicant : Netcon Enterprise Pvt Ltd.
Address : 430A, Kathirvedu, Puzhal, Chennai- 600066, India
Manufacturer : Netcon Enterprise Pvt Ltd.
Address : 430A, Kathirvedu, Puzhal, Chennai- 600066, India
EUT Description : NETCON Outdoor UPS 1-10KVA with air conditioner
Model No. : NTPR1K, NTPR2K, NTPR3K, NTPR6K, NTPR10K
Remark : N/A

Test Procedure Used:

EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021,
EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021

The results of this test report are only valid for the mentioned equipment under test. The test report with all its sub-reports, e.g. tables, photographs and drawings, is copyrighted. Unauthorized utilization, especially without permission of the test laboratory, is not allowed and punishable. For copying parts of the test report, a written permission by the test laboratory is needed.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 2024-08-05

Prepared by



(Jack)

Checked by



(Gina)

Approved by



(Johnson)

1 –EN IEC 61000-6-1:2019

1.1 Continuous Disturbance Voltage at Mains Terminal.

1.1.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Albatross Projects GmbH	Shield Room	Site 1	---	2021.10	3 Year
R&S	EMI Test Receiver	ESU40	1302	2021.11	3 Year
R&S	Artificial Mains	ENV216	1107	2021.2	3 Year
R&S	EMI Test System Cabinet	---	---	N/A	N/A
R&S	EMI Test Software	EMC32	---	N/A	N/A

1.1.2 Description of Measurement Conditions

Temperature: 21°C
 Humidity: 58%
 Pressure: 1033mbar
 Electromagnetic environment: normal

1.1.3 Limits of Continuous Disturbance Voltage at Mains Terminal.

Equipment type	Frequency range MHz	Limit values dB / V	
		Quasi-peak	Average
Infrared paint driers	0.15 to 0.5	66-56 ^a	56- 46 ^a
	0.5 to 5	56	46
	5 to 30	60	50
^a Decreasing linearly with logarithm of the frequency.			

Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.


1.1.4 Test procedure and the test set-up

Procedure

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under limit -20dB of the prescribed limits could not be reported.

Set-up

The configuration is in accordance with the requirement in EN 61000-6-4, the sketch map as follow:

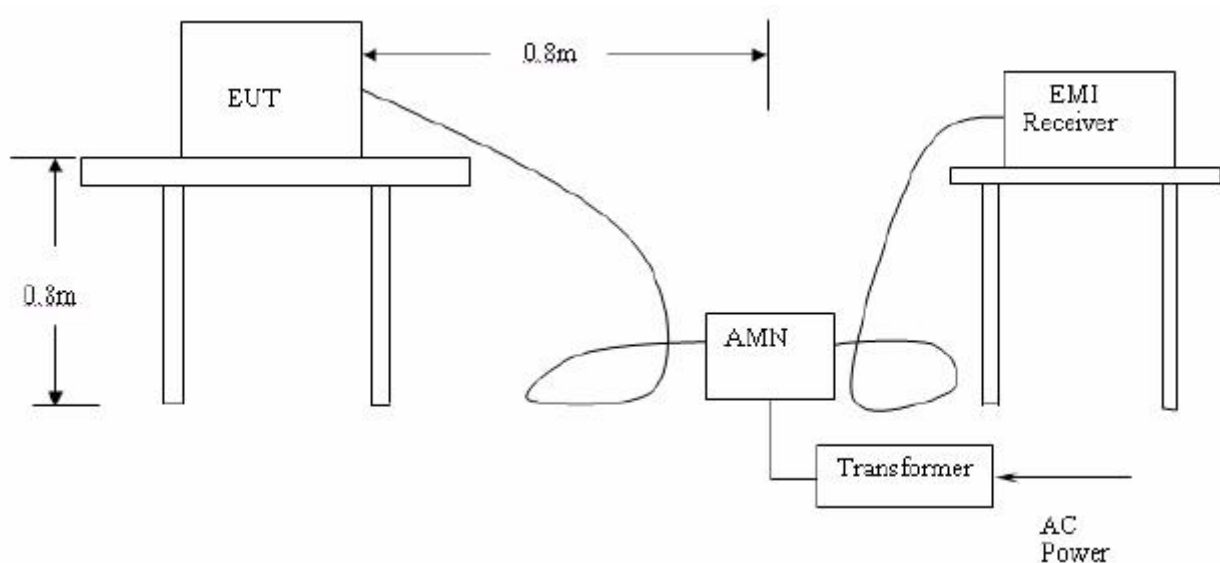


1.1.5 Test Data and Records

Passed

L&N

VOLTAGE WITH ENV216 AUTO

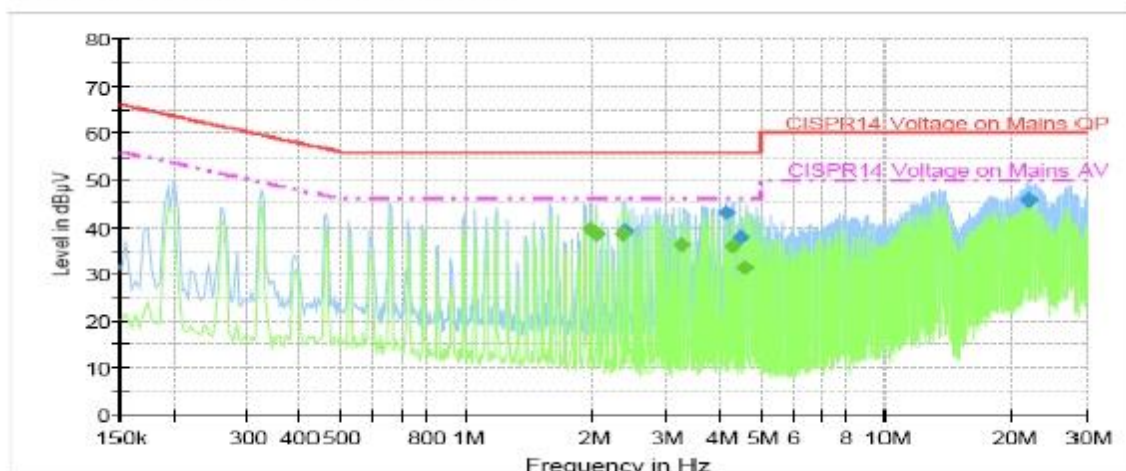

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
2.381600	39.3	3000.000	9.000	On	N	10.0	16.7	56.0	
4.154420	43.2	3000.000	9.000	On	N	10.0	12.8	56.0	
4.497260	37.8	3000.000	9.000	On	N	10.0	18.2	56.0	
21.777500	45.8	3000.000	9.000	On	L1	10.4	14.2	60.0	
21.841500	45.9	3000.000	9.000	On	L1	10.4	14.1	60.0	
21.981500	45.6	3000.000	9.000	On	N	10.4	14.4	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
1.971720	39.5	3000.000	9.000	On	N	10.0	6.5	46.0	
2.038700	38.4	3000.000	9.000	On	L1	10.0	7.6	46.0	
2.365600	38.6	3000.000	9.000	On	N	10.0	7.4	46.0	
3.287620	36.1	3000.000	9.000	On	L1	10.0	9.9	46.0	
4.272560	36.0	3000.000	9.000	On	N	10.0	10.0	46.0	
4.607520	31.3	3000.000	9.000	On	L1	10.0	14.8	46.0	

1.1.6 Verdict

Test model: NTPR1K

The EUT met the requirement.

1.2 Radiated disturbances

1.2.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Albatross Projects GmbH	Anechoic Chamber	---	9290832	2021.10	3 Year
R&S	Ultra-broadband Antennas	HL562	---	2021.1	3 Year
Inn-co GmbH	Antenna Towers	---	---	N/A	N/A
R&S	EMI Test Receiver	ESU40	1302	2021.11	3 Year
Inn-co GmbH	Turntable	DS2000S-1t		N/A	N/A
Inn-co GmbH	Controller	CO 2000	10806L	N/A	N/A
R&S	EMI Test Software	EMC32	---	N/A	N/A
R&S	EMI Test System Cabinet	---	---	N/A	N/A

1.2.2 Description of Measurement Conditions

Temperature: 20°C

Humidity: 60%

Pressure: 1033mbar

Electromagnetic environment: normal

1.2.3 Limits of radiated disturbances of class B ITE at a measuring distance of 3m.

Frequency range MHz	Quasi-peak limits(3m) dB(µV/m)
30 to 230	40
230 to 1000	47
NOTE: The lower limit shall apply at the transition frequency. NOTE: Additional provisions may be required for cases where interference occurs.	


1.2.4 Test procedure and the test set-up

Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m semi/full-anechoic chamber.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using the quasi-peak method or average method as specified and then reported In Data sheet peak mode and QP mode.


Set-up

The configuration is in accordance with the requirement in EN61000-6-4, the sketch map as follow:

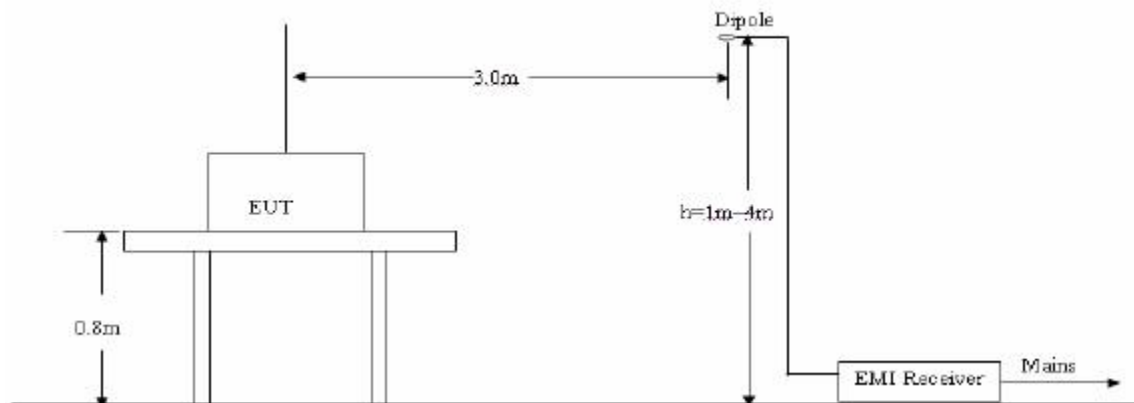

1.2.5 Test Data and Records

Passed

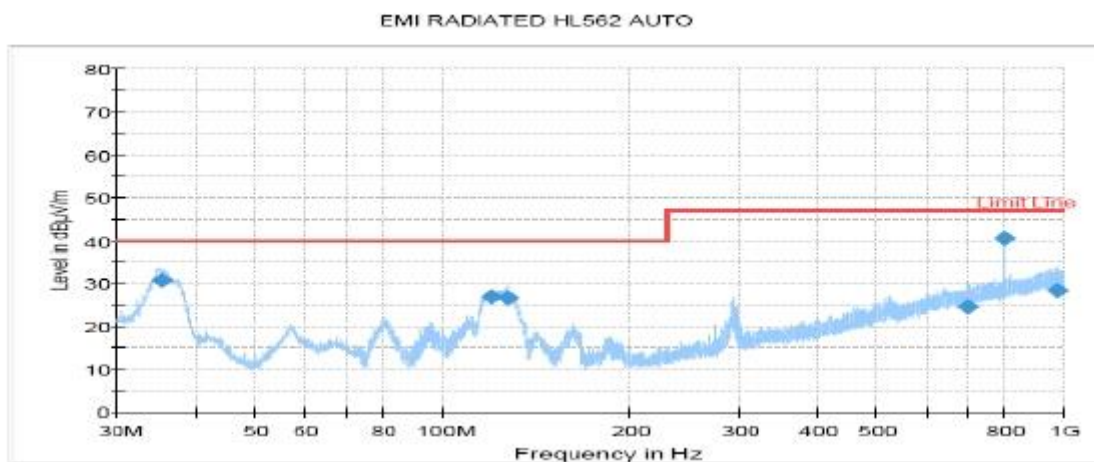

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
35.280500	30.8	1000.0	120.000	207.0	V	8.0	17.3	9.2	40.0
120.007500	26.9	1000.0	120.000	250.0	H	8.0	11.5	13.1	40.0
127.097000	26.6	1000.0	120.000	200.0	V	0.0	11.0	13.4	40.0
704.617500	24.4	1000.0	120.000	340.0	H	191.0	23.3	22.6	47.0
800.043000	40.5	1000.0	120.000	212.0	V	185.0	24.8	6.5	47.0
978.474500	28.4	1000.0	120.000	250.0	H	85.0	27.0	18.6	47.0

1.2.6 Verdict

Test model: NTPR1K

The EUT met the requirement.

2 –EN IEC 61000-6-3:2021**Description of Performance Criterion****Performance Criterion A**

The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacture, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance Criterion B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacture, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance Criterion C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

2.1 SURGES

2.1.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Noise Laboratory CO., LTD	Surge Lite	LSS-6030	9099E00350	2021.11	3 Year

2.1.2 Description of Measurement Conditions

Temperature: 21°C

Humidity: 58%

Pressure: 1033mbar


Electromagnetic environment: normal

2.1.3 test procedure and the test set-up

Procedure

- a. For EUT power supply:
The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:
The surge is applied to the lines via the capacitive coupling. The coupling / decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- c. For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT: The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- a. Both positive and negative polarity discharges were applied.

Set-up

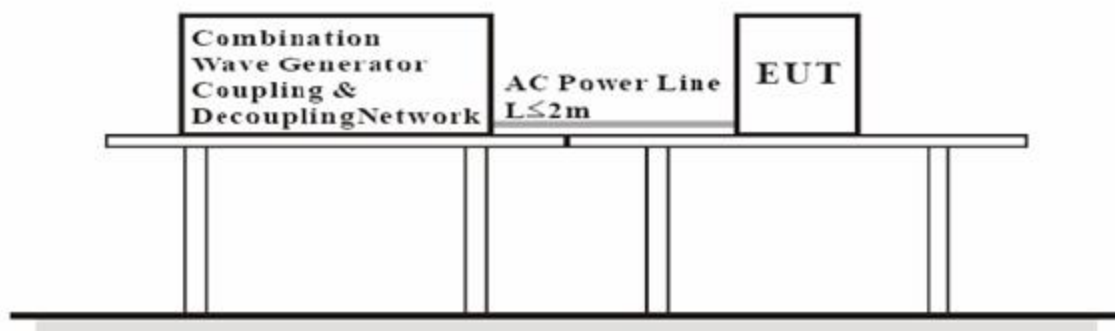

2.1.4 Test Data and Records

Terminal	Voltage	Path	Phase	Number Of Impulses	Pass	Fail
	KV					
MAINS	±1	L1-L2 L2-L3 L3-L1	0°	5	B	
MAINS	±1	L1-L2 L2-L3 L3-L1	90°	5	B	
MAINS	±1	L1-L2 L2-L3 L3-L1	180°	5	B	
MAINS	±1	L1-L2 L2-L3 L3-L1	270°	5	B	
MAINS	±2	L1-PE L2-PE L3-PE N-PE	0°	5	B	
MAINS	±2	L1-PE L2-PE L3-PE N-PE	90°	5	B	
MAINS	±2	L1-PE L2-PE L3-PE N-PE	180°	5	B	
MAINS	±2	L1-PE L2-PE L3-PE N-PE	270°	5	B	

2.1.5 Verdict

Test model: NTPR1K

The EUT was working as normal, so they met the requirement of performance criteria B.

2.2 ESD

2.2.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Shanghai Sanki	Electrostatic Discharge tester	ESD-320	0329501C	2021.6	3 Year

2.2.2 Description of Measurement Conditions

Temperature: 21°C

Humidity: 58%


Pressure: 1033mbar

Electromagnetic environment: normal

2.2.3 Test procedure and the test set-up

Procedure

- Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each Horizontal Coupling Plane opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the HCP and perpendicular to its front edge during the discharge.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

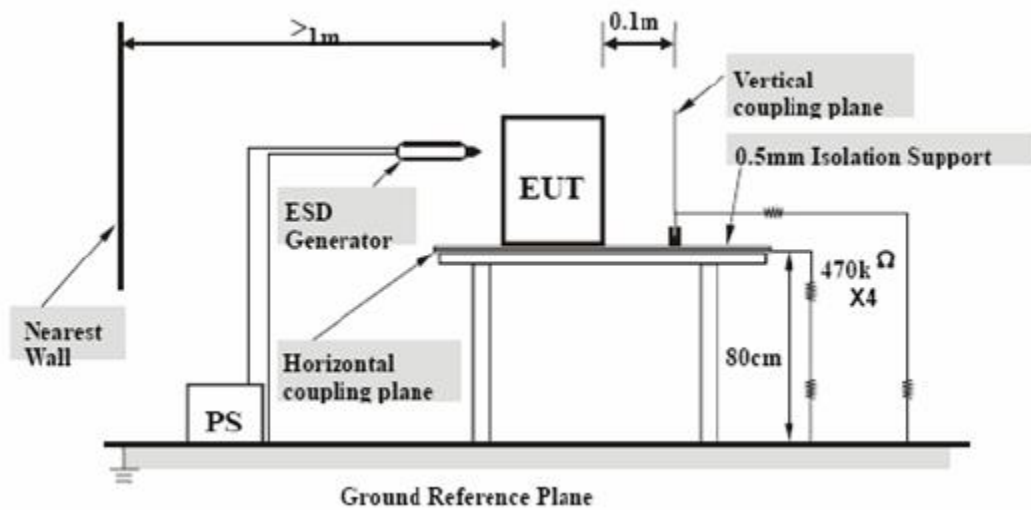Set-up**2.2.4 Test Data and Records****Air Discharge**

Test Levels																
EN61000-4-2 Test Points	- 2	+ 2	- 4	+ 4	- 6	+ 6	- 8	+ 8	- 1	+1 0	-12. 5	+12. 5	-1 5	+1 5	-2 0	+ 2
EUT Front Side	B	B	B	B	B	B	B	B								
EUT Top Side	B	B	B	B	B	B	B	B								
EUT Back Side	B	B	B	B	B	B	B	B								
EUT Left Side	B	B	B	B	B	B	B	B								
EUT Right Side	B	B	B	B	B	B	B	B								

Direct Contact

Test Levels																
EN61000-4-2 Test Points	- 2	+ 2	- 4	+ 4	- 6	+ 6	- 8	+ 8	- 1	+1 0	-12. 5	+12. 5	-1 5	+1 5	- 2	+2 0
EUT Front Side	B	B	B	B												
EUT Top Side	B	B	B	B												
EUT Back Side	B	B	B	B												
EUT Left Side	B	B	B	B												
EUT Right Side	B	B	B	B												

2.2.5 Verdict**Test model: NTPR1K**

The EUT was working as normal, so they met the requirement of performance criteria B.

2.3 EFT/B

2.3.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Shanghai Sanki	E.F.TB Generator	8014	069504E	2021.6	3 Year

2.3.2 Description of Measurement Conditions

Temperature: 21°C

Humidity: 58%

Pressure: 1033mbar


Electromagnetic environment: normal

2.3.3 Test procedure and the test set-up

Procedure

- Both positive and negative polarity discharges were applied.
- The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

Set-up

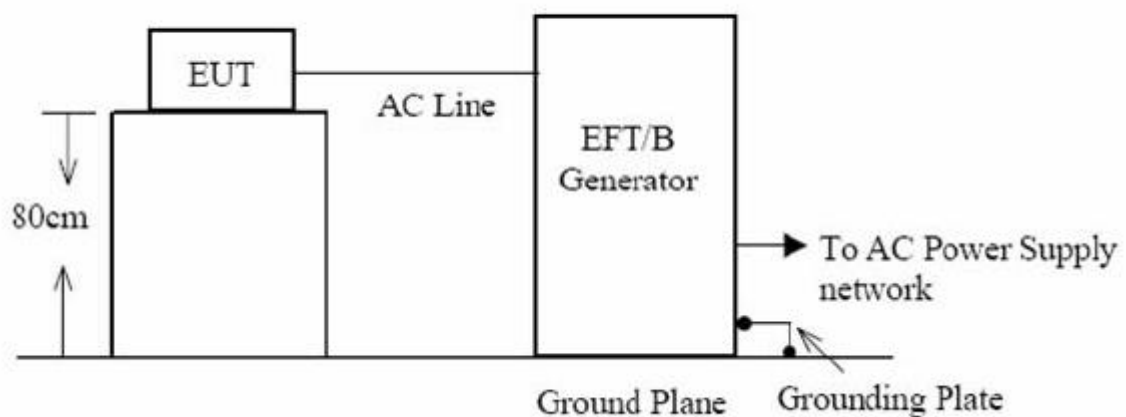

2.3.4 Test Data and Records

Test Levels (kV)									
EN61000-4-4 Test Points		+0.2	-0.2	+0.5	-0.5	+1.0	-1.0	+2.	-2.
Power Port of EUT	L1/L2/L3	A	A	A	A	A	A		
	N	A	A	A	A	A	A		
	PE	A	A	A	A	A	A		
	L1/L2/L3+ N+PE	A	A	A	A	A	A	A	A

2.3.5 Verdict

Test model: NTPR1K

The EUT was working as normal, so they met the requirement of performance criteria A.

2.4 INJECTED CURRENTS

2.4.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Giga-tronics	Synthesized RF Signal Generator	6061A	5130304	2021.2	3 Year
QF	Broadband Power Amplifier	QF3860	---	2021.2	3 Year
QF	Millivoltmeter	QF2281	92028	2021.2	3 Year

2.4.2 Description of Measurement Conditions

Temperature: 21°C

Humidity: 58%

Pressure: 1033mbar


Electromagnetic environment: normal

2.4.3 Test procedure and the test set-up

Procedure

- The EUT shall be tested within its intended operating and climatic conditions.
- The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
- The frequency range is swept from 150 kHz to 230 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate shall not exceed 1.5×10^{-3} decades/s. The step size shall not exceed 1 % of the start and thereafter 1 % of the preceding frequency value where the frequency is swept incrementally.
- The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, shall be analyzed separately.
- Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

Set-up

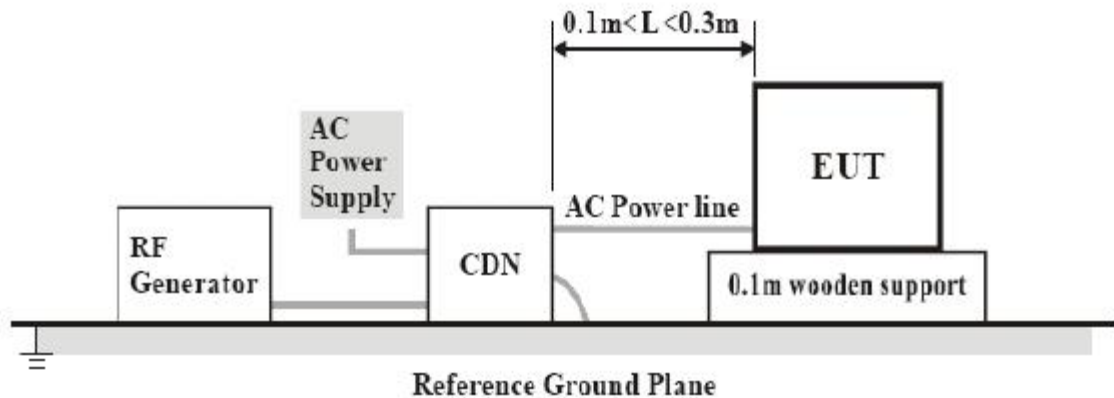

2.4.4 Test Data and Records

EN61000-4-6 Test Points	Frequency range MHz	Levels	Voltage Level (e.m.f.)V	Pass	Fail
Power Line	0.15-230MHz	1	1		
		2	3	A	
		3	10		
		X	Special		

2.4.5 Verdict

Test model: NTPR1K

The EUT was working as normal, so they met the requirement of performance criteria A.

2.5 VOLTAGE DIPS AND INTERRUPTIONS

2.5.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
Noise Laboratory CO., LTD	Voltage Dip Simulator	VDS-220B	2199D00098	2021.10	3 Year

2.5.2 Description of Measurement Conditions

Temperature: 21°C

Humidity: 58%

Pressure: 1033mbar


Electromagnetic environment: normal

2.5.3 Test procedure and the test set-up

Procedure

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

Set-up

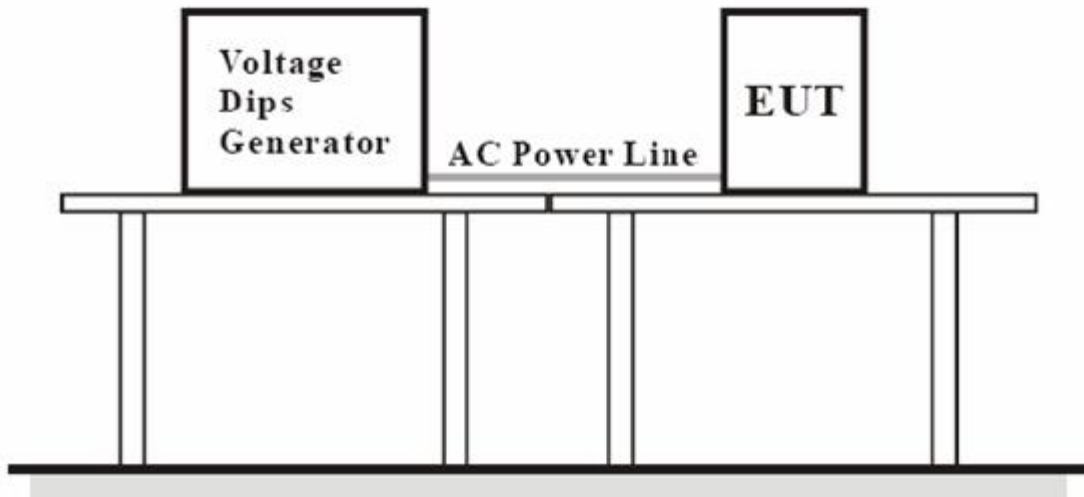

2.5.4 Test Data and Records

Environmental phenomena		Test level in % U_T	Duration (in periods of the rated frequency)	Phase Angle	Pass	Fail
Interruptions		>95	0.5T	0/180	C	
Voltage dips in % U_T	60	40	10T	0/180	C	
	30	70	50T	0/180	C	

2.5.5 Verdict

Test model: NTPR1K

The EUT was working as normal, so they met the requirement of performance criteria C.

2.6 Radio-frequency electromagnetic field

2.6.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
R&S	Signal Generator	SMR-40	1104	2021.11	3 Year
QF	Broadband Power Amplifier	QF3860	---	2021.2	3 Year
QF	Millivoltmeter	QF2281	92028	2021.2	3 Year
Albatross Projects GmbH	Anechoic Chamber	---	9290832	2021.10	3 Year
R&S	Ultra-broadband Antennas	HL562	---	2021.1	3 Year
Inn-co GmbH	Antenna Towers	---	---	N/A	N/A
Inn-co GmbH	Turntable	DS2000S-1t	---	N/A	N/A
Inn-co GmbH	Controller	CO 2000	10806L	N/A	N/A

2.6.2 Description of Measurement Conditions

Temperature: 20°C

Humidity: 60%

Pressure: 1033mbar

Electromagnetic environment: normal


2.6.3 Test procedure and the test set-up

Procedure

The test procedure was in accordance with EN 61000-4-3

- The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sinewave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The field strength level was 3V/m.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

Set-up

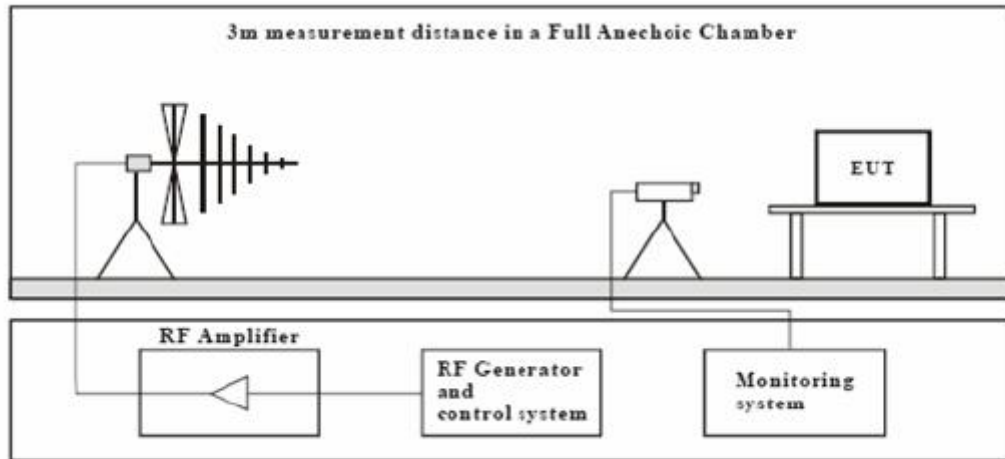

2.6.4 Test Data and Records

The EUT was tested that it worked at the normal state.

Frequency Range (MHz)	Front Side (3 V/m)		Rear Side (3 V/m)		Left Side (3 V/m)		Right Side (3 V/m)	
	VERT	HOR	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	A	A	A	A	A	A	A	A

2.6.5 Verdict

Test model: NTPR1K

The EUT was working as normal, so it met the requirement of performance criteria A.

1 – EN IEC 61000-3-2:2019+A1:2021

1.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
EMC-PARTNER	Harmonics and Flicker Analyzer	HARMONIC S-1000	HAR1000-40	2021.7	3 Year

1.2 Limits


Limits for Class A equipment	
Harmonic order n	Maximum permissible harmonic current A
Odd harmonics	
3	2,30
5	1,14
7	0,77
9	0,40
11	0,33
13	0,21
$15 \leq n \leq 39$	$0,15 \frac{15}{n}$
Even harmonics	
2	1,08
4	0,43
6	0,30
$8 \leq n \leq 40$	$0,23 \frac{8}{n}$

1.3 Test procedure and the test set-up

Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:
 - Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
 - Class B: Portable tools. Arc welding equipment which is not professional equipment
 - Class C: Lighting equipment, including dimming devices.
 - Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

Set-up

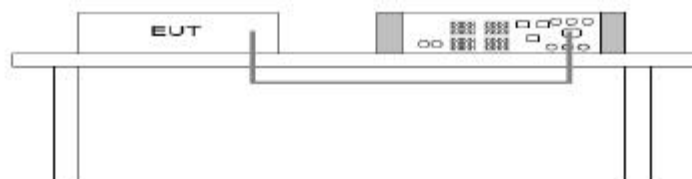

1.4 Test Data and Records

Order	Freq.[Hz]	Limit %	Result
2	100	8	Pass
3	150	21.6	Pass
4	200	4	Pass
5	250	10.7	Pass
6	300	2.7	Pass
7	350	7.2	Pass
8	400	2	Pass
9	450	3.8	Pass
10	500	1.6	Pass
11	550	3.1	Pass
12	600	1.3	Pass
13	650	2	Pass
14	700	23	Pass
15	750	23	Pass
16	800	23	Pass
17	850	23	Pass
18	900	23	Pass
19	950	23	Pass
20	1000	23	Pass
21	1050	23	Pass
22	1100	23	Pass
23	1150	23	Pass
24	1200	23	Pass
25	1250	23	Pass
26	1300	23	Pass
27	1350	23	Pass
28	1400	23	Pass
29	1450	23	Pass
30	1500	23	Pass
31	1550	23	Pass
32	1600	23	Pass
33	1650	23	Pass
34	1700	23	Pass
35	1750	23	Pass
36	1800	23	Pass
37	1850	23	Pass
38	1900	23	Pass
39	1950	23	Pass
40	2000	23	Pass

1.5 Verdict

Test model: NTPR1K
The EUT met the requirement.

2 – EN 61000-3-3:2013+A2:2021

2.1 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Last Cal. Date	Cal. Period
EMC-PARTNER	Harmonics and Flicker Analyzer	HARMONIC S-1000	HAR1000-40	2021.7	3 Year

2.2 Limits

The value of P_{st} shall not be greater than 1.0;
 The value of P_{lt} shall not be greater than 0.65;
 The value of $d(t)$ during a voltage change shall not exceed 3.3% for more than 500ms;
 The relative steady-state voltage change, dc , shall not exceed 3.3%;
 The maxim relative voltage change, d_{max} , shall not exceed 4%.

Notes:

P_{st} : Short-term flicker indicator The flicker severity evaluated over a short period (in minutes); $P_{st}=1$ is the conventional threshold of irritability;

P_{lt} : long-term flicker indicator; the flicker severity evaluated over a long period (a few hours) Using successive P_{st} values;

dc : the relative steady-state voltage change ;

d_{max} : maximum relative voltage change ;


$d(t)$: the value during a voltage change .

2.3 Test procedure and the test set-up

Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

Set-up

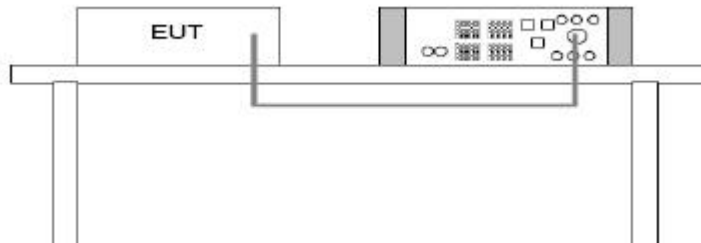

2.4 Test Data and Records

Waveform:	Sine	Test Time:	10 minutes(Pst); 2 hours (Plt)																									
<table><tr><th>Flicker and Voltage Fluctuation</th><th>Limit</th><th>Value</th><th>Remarks</th></tr><tr><td>Short-term flicker Indicator Pst</td><td>1.0</td><td>0.212</td><td>Pass</td></tr><tr><td>Long -term flicker Indicator Plt</td><td>0.65</td><td>0.185</td><td>Pass</td></tr><tr><td>Relative Steady-state Voltage Change dc [%]</td><td>3.3</td><td>0.064</td><td>Pass</td></tr><tr><td>Maximum Relative Voltage Change dmax [%]</td><td>4.0</td><td>0.497</td><td>Pass</td></tr><tr><td>Relative Voltage Change Characteristic dt [s]</td><td>0.50</td><td>0.000</td><td>Pass</td></tr></table>					Flicker and Voltage Fluctuation	Limit	Value	Remarks	Short-term flicker Indicator Pst	1.0	0.212	Pass	Long -term flicker Indicator Plt	0.65	0.185	Pass	Relative Steady-state Voltage Change dc [%]	3.3	0.064	Pass	Maximum Relative Voltage Change dmax [%]	4.0	0.497	Pass	Relative Voltage Change Characteristic dt [s]	0.50	0.000	Pass
Flicker and Voltage Fluctuation	Limit	Value	Remarks																									
Short-term flicker Indicator Pst	1.0	0.212	Pass																									
Long -term flicker Indicator Plt	0.65	0.185	Pass																									
Relative Steady-state Voltage Change dc [%]	3.3	0.064	Pass																									
Maximum Relative Voltage Change dmax [%]	4.0	0.497	Pass																									
Relative Voltage Change Characteristic dt [s]	0.50	0.000	Pass																									
Result: PASSED																												

2.5 Verdict

Test model: NTPR1K
The EUT met the requirement.

Annex : Technical Information

(1) Product Photos



A.1



A.2